




**INTERNALLY WEIGHTED
NON-MERCURY FLOAT SWITCH - CONTROL DUTY**
2900 MECHANICAL SERIES - NARROW ANGLE FLOAT SWITCH

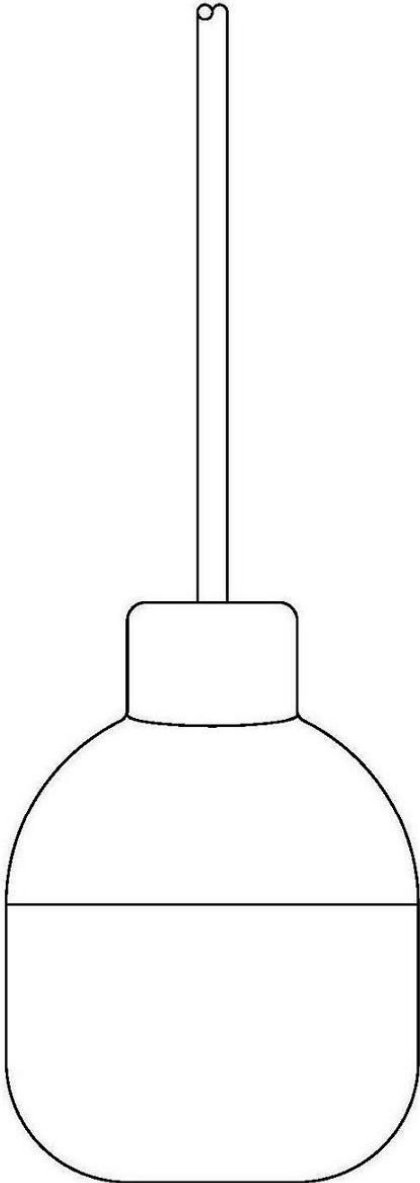

GENERAL

DESIGNED FOR ACCURATE LIQUID LEVEL CONTROL IN MANY APPLICATIONS INCLUDING POTABLE WATER OR SEWAGE ENVIRONMENTS. THE FLOAT SWITCH CAN BE UTILIZED TO SIGNIFY SPECIFIC WATER LEVELS OR FOR DIRECT ALARM ACTUATION.

SWITCH VARIATIONS

NORMALLY OPEN (N/O)

THE CONTACTS ARE OPEN (OR OFF) IN THE HANGING POSITION. AS THE FLOAT RISES 1" (5°) ABOVE HORIZONTAL, THE CONTACTS BECOME CLOSED AND ACTUATE (TURN ON) THE SWITCH. THIS FLOAT IS GENERALLY USED IN PUMP DOWN APPLICATIONS.

NORMALLY CLOSED (N/C)

THE CONTACTS ARE CLOSED (OR ON) IN THE HANGING POSITION. AS THE FLOAT RISES 1" (5°) ABOVE HORIZONTAL, THE CONTACTS BECOME OPEN AND ACTUATE (TURN OFF) THE SWITCH. THIS FLOAT IS GENERALLY USED IN PUMP UP APPLICATIONS.

SINGLE POLE, DOUBLE THROW (SPDT)

A VARIATION OF THE PREVIOUSLY LISTED SWITCHES. THIS FLOAT SWITCH CAN BE WIRED TO OPERATE AS EITHER (BUT NOT BOTH) A NORMALLY OPEN OR NORMALLY CLOSED SWITCH BASED ON THE USER'S NEED.

SWITCH SPECIFICATIONS

2900 SERIES MECHANICAL FLOAT SWITCHES ARE DESIGNED TO OPERATE UNDER THE FOLLOWING PARAMETERS.

MINIMUM OPERATING TEMPERATURE	-	32 DEGREES F.
MAXIMUM OPERATING TEMPERATURE	-	170 DEGREES F.
ELECTRICAL RATING	-	10 AMP-120 VAC, 3 AMP-240 VAC
ACTUATION POINT	-	1" ABOVE / BELOW HORIZONTAL.

POWER CORD SPECIFICATIONS

CONDUCTOR CORD - PHYSICAL	-	CHLORINATED POLY ETHYLENE.
ELECTRICAL FOR N/O OR N/C SWITCH	-	18 AWG 2, TYPE SJOOW - 300 V.
ELECTRICAL FOR SPDT SWITCH	-	18 AWG 3, TYPE SJOOW - 300 V.

FLOAT SPECIFICATIONS

DURABLE POLYPROPYLENE MATERIAL CONSTRUCTION.
SOLID POLYURETHANE FOAM INTERIOR.
LEAK PROOF, SHOCK PROOF, AND IMPACT RESISTANT.
RESISTANT TO SEWAGE AND WASTEWATER APPLICATIONS.



CONERY MFG INC
info@conerymfg.com

1380 ENTERPRISE PKWY
PH (419) 289-1444

ASHLAND, OH 44805
FAX (419) 281-0366




IND. CONT. EQ.
47UF
E190171

Type: NAMERC
10 Amp @ 120 Vac
3 Amp @ 240 Vac

2900 SERIES B6

PAGE
1

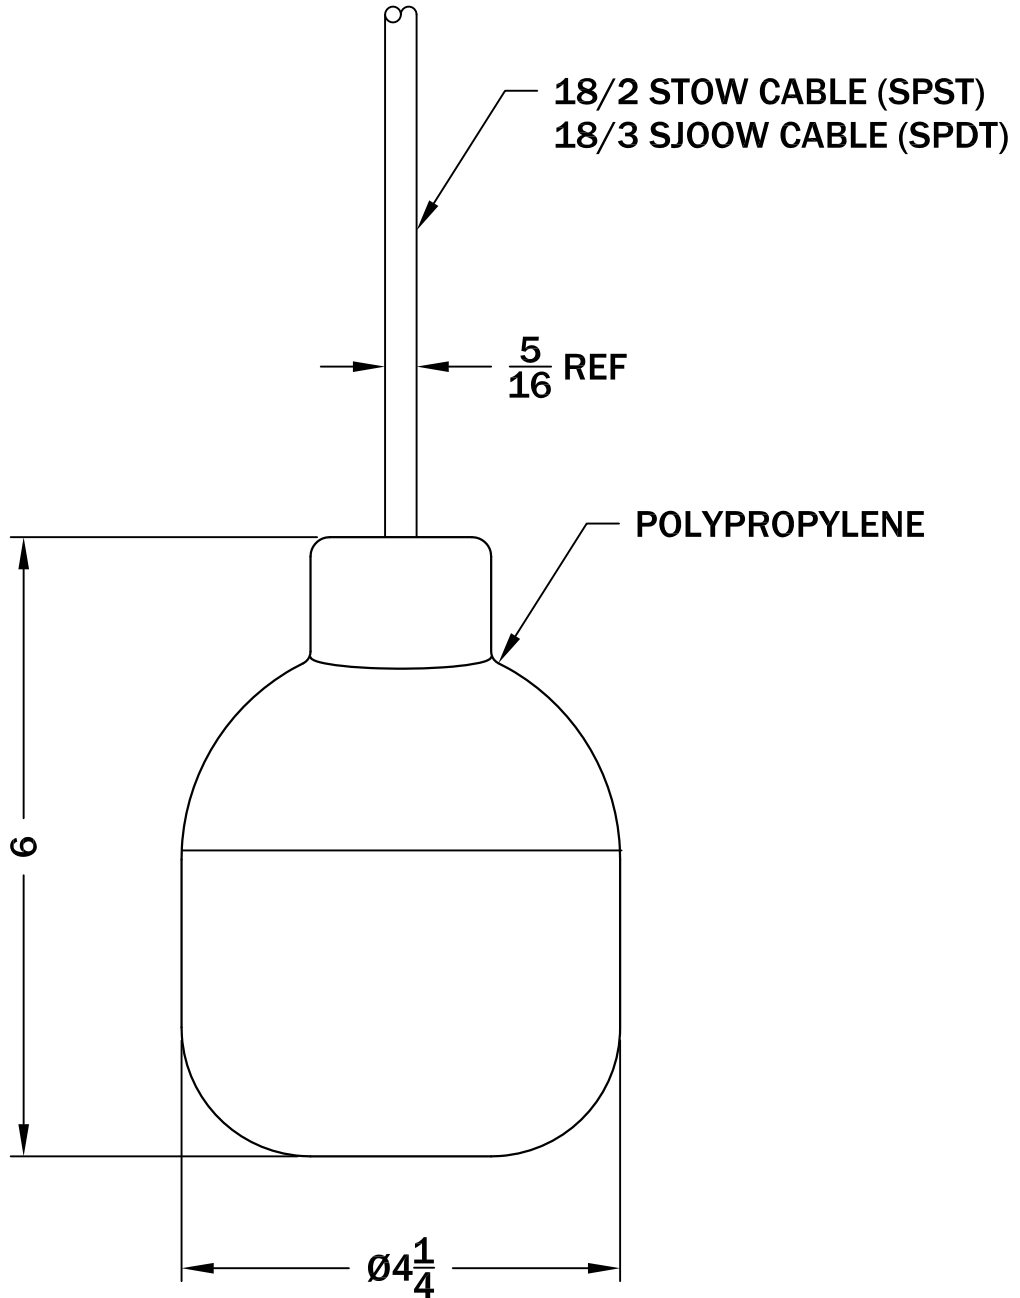

ALL INFORMATION CONTAINED IN THIS DRAWING IS
CONFIDENTIAL AND PROPRIETARY TO CONERY MFG, INC.






CHANGES	TOLERANCES	DRAWN BY	DATE	SPECIFICATION SHEET INTERNALLY WEIGHTED	
F	DECIMALS .XXX = ±.005 .XX = ±.010 FRACTIONAL X/X = ±.1/64 ANGLES X° = ±1/2°	D. MIDDLETON	02/20/04	SCALE:	PART NO.
E		MATERIAL SPECIFICATION: NARROW ANGLE MECHANICAL FLOAT		HALF	2900 SERIES B6
D					
C					
B					
A					

NOTE: ALL ELECTRICAL DIAGRAMS SHOWN ARE EXAMPLES ONLY,
 CONSULT WITH LOCAL ELECTRICAL AUTHORITIES AND CODES.
 DO NOT USE THESE PRODUCTS IN GASOLINE, VOLATILES,
 OTHER COMBUSTIBLES.

FOR PUMP DOWN USE
 (NORMALLY OPEN FLOATS)
 FOR PUMP UP USE
 (NORMALLY CLOSED FLOATS)
 FOR SPDT FLOATS
 GREEN - N/O
 WHITE - COMMON
 BLACK - N/C



TYPICAL MOUNTING

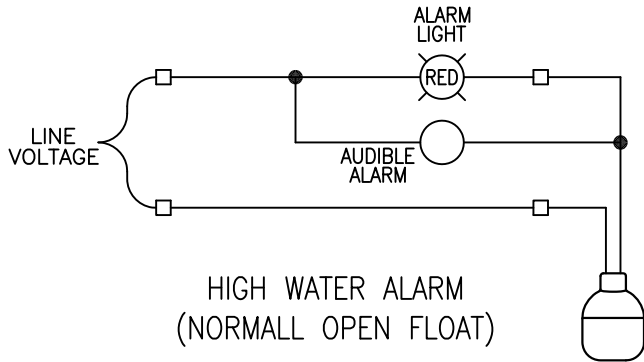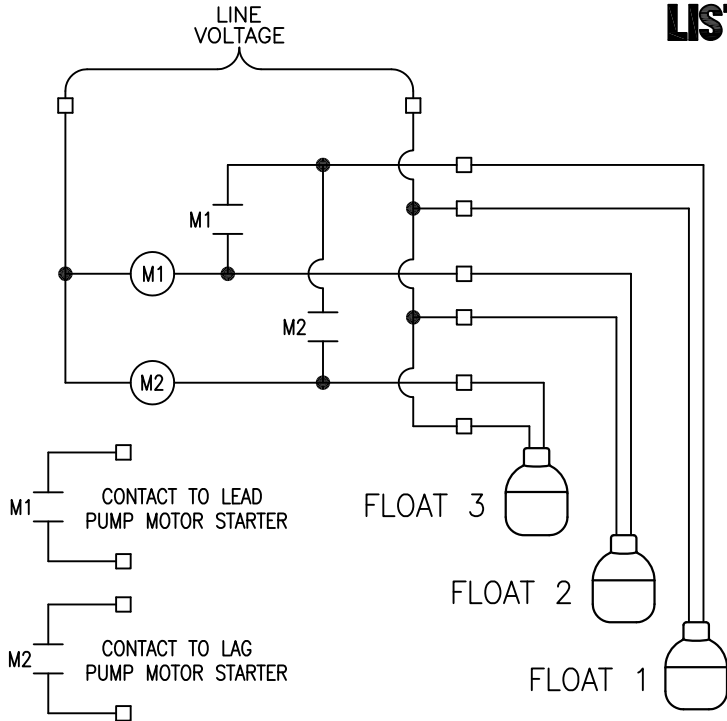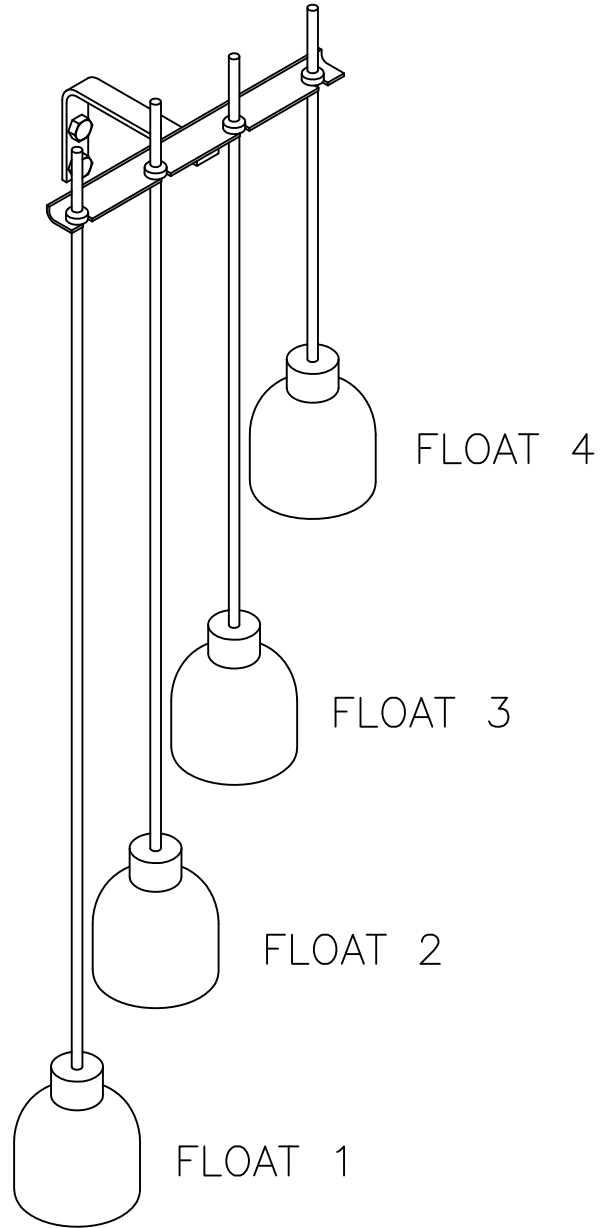

ALL INFORMATION CONTAINED IN THIS DRAWING IS
 CONFIDENTIAL AND PROPRIETARY TO CONERY MFG, INC.



CHANGES	TOLERANCES	DRAWN BY	DATE
F	DECIMALS .XXX = ±.005	D. MIDDLETON	02/20/04
E	.XX = ±.010	MATERIAL SPECIFICATION: NARROW ANGLE MECHANICAL FLOAT	
D	FRACTIONAL		
C	X/X = ±.1/64		
B	ANGLES		
A	X° = ±1/2°		

SPECIFICATION SHEET INTERNALLY WEIGHTED	
SCALE:	PART NO.
NONE	2900 SERIES B6