



SHACKLES


PAGE
1




$\frac{1}{4}$ "




$\frac{5}{16}$ "




DIA "C"



$\frac{3}{8}$ "

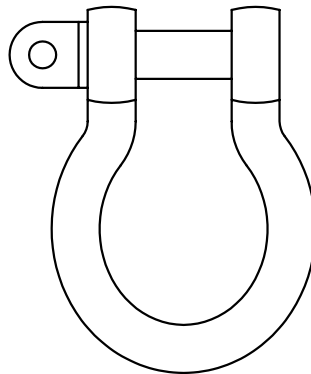

$\frac{1}{2}$ "

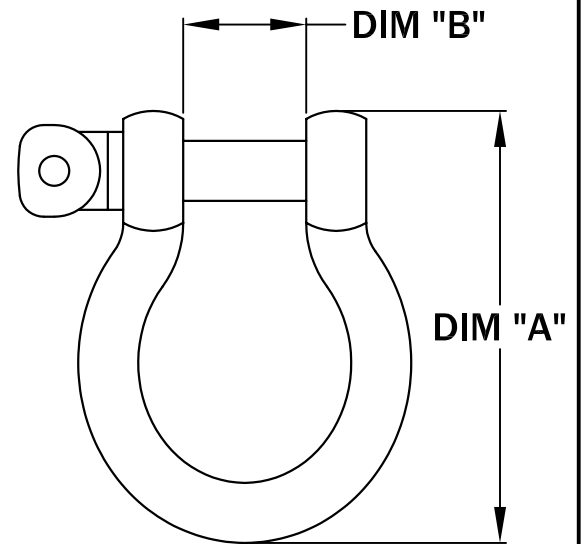

$\frac{5}{8}$ "

SIZE	DIM "A"	DIM "B"	DIA "C"	SAFE WORK LOAD	PIN DIA.
1/4"	1.93"	0.44"	0.63"	667 lbs	0.31"
5/16"	2.18"	0.64"	0.63"	1,000 lbs	0.47"
3/8"	2.50"	0.78"	0.75"	1,500 lbs	0.38"
1/2"	3.56"	1.00"	1.00"	3,000 lbs	0.50"
5/8"	4.50"	1.28"	1.25"	4,000 lbs	0.63"

ALL INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY TO CONERY MFG, INC.



CHANGES	TOLERANCES	DRAWN BY	DATE
F	DECIMALS .xxx = ±.005 .xx = ±.010 FRACTIONAL x/x = ±.1/64 ANGLES x' = ±1/2'	D. MIDDLETON	03/22/04
E		MATERIAL SPECIFICATION: 316 SST	
D			
C			
B			
A			

SPECIFICATION SHEET
DIMENSIONAL DATA

SCALE: PART NO.
HALF STAINLESS STEEL