

NOTE: ALL DIMENSIONS ARE IN INCHES.

MATERIALS OF CONSTRUCTION:

BASE ELBOW: 316 SST

LIFT-OUT FLANGE: 316 SST

W/SST SEALING RING

LOWER GUIDE BRACKET: 316 SST

ALL FASTENERS ARE 304 SERIES SST

USEABLE GUIDE RAIL SIZES: 1½" & 2"





SPHERICAL SOLIDS SIZE: 4" Diameter.

MAXIMUM WEIGHT ALLOWANCE: 2000lbs.

BERS-0400-SST

PAGE
1

MOUNTING DIMENSIONS

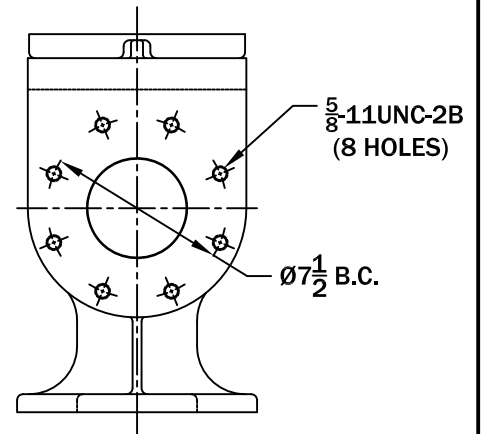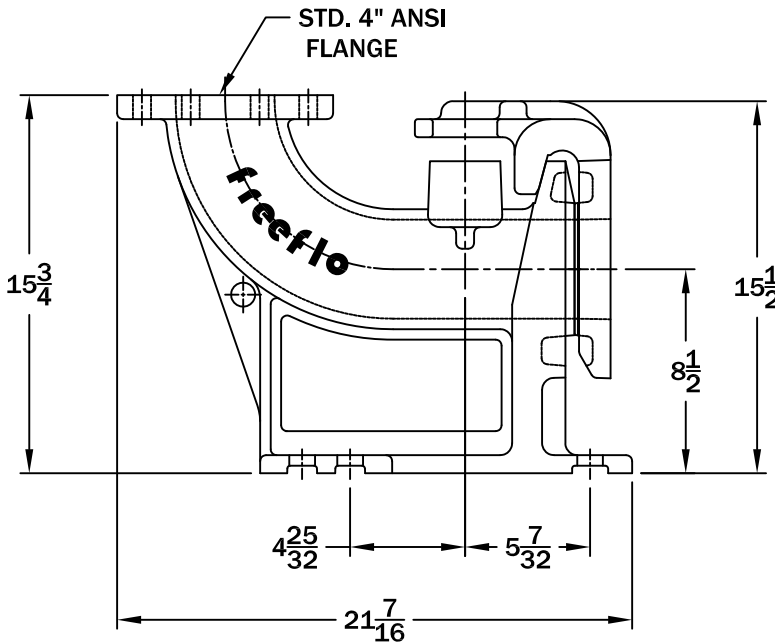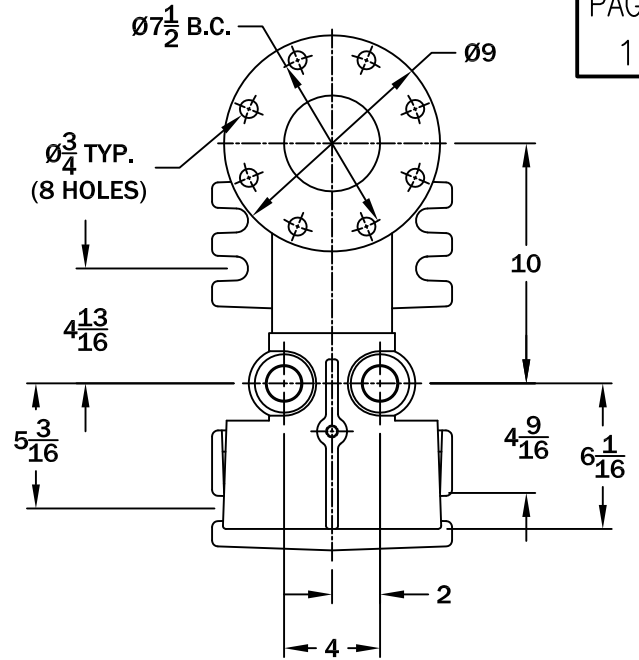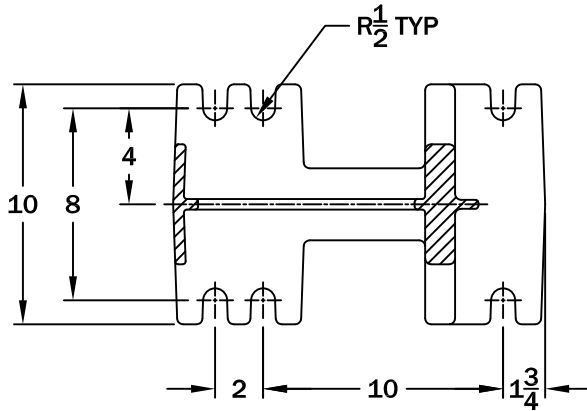

ALL INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY TO CONERY MFG, INC.



CHANGES	TOLERANCES	DRAWN BY	DATE
F	DECIMALS	D. MIDDLETON	11/15/15
E	.XXX = ±.005	MATERIAL SPECIFICATION:	
D	.XX = ±.010		
C	FRACTIONAL	AS NOTED	
B	X/X = ±.1/64		
A	ANGLES		
	X° = ±1/2°		

SPECIFICATION SHEET
DIMENSIONAL DATA

SCALE: PART NO.
1/8 4" LIFT OUT DIM