

CONERYTM

MFG INC

ENGINEERED
QUALITY
BUILT FOR YOU



PRODUCT CATALOG

EFFECTIVE JANUARY 1, 2023

PRICES MAY CHANGE AT ANY TIME

Conery Manufacturing has been providing quality products for water and wastewater pumping stations for over 40 years. We have built strong customer relationships based upon quality products, quick and accurate shipments, and competitive pricing. Find out what makes Conery Manufacturing different.



BASE ELBOW RAILS

Built to meet the engineered standards of municipal wastewater stations, freeflo elbows are designed to configure with nearly all submersible pumps in the market today. As the offering of freeflo elbows has expanded to include 316 Stainless Steel options, so has our experience with thousands of quality installations.



FLOAT SWITCHES

Quality and reliability are the hallmarks of our proven line of float switches. Regardless of specification or application, Conery Mfg Inc is dedicated to providing the right float switch with knowledgeable customer service, unmatched production flexibility, and timely shipping.

DEAR CUSTOMERS,

After 44 years Conery Mfg, Inc. remains dedicated to providing our customers with quality products coupled with excellent customer service. We are committed to offering you the tools you need to successfully accomplish your most challenging tasks. At Conery Manufacturing we take pride in our ability to serve our customers' most important needs. From our extensive product line and engineered drawings to our trained staff, we are ready to provide you with the hardware and information you need to make your project a success.

Sincerely,

Chris Shafer

Vice President



*** PRICES MAY CHANGE AT ANY TIME ***



Freeflo Guiderail Kits



Fiber Glyde

EZ Glyde

		List	With Discharge Piping
FiberGlyde	125-6'	\$1028.00	\$1230.00
FiberGlyde	125CV-6'	\$1300.00	\$1500.00
EZGlyde	125-6'	\$1282.00	\$1485.00
EZGlyde	125CV-6'	\$1488.00	\$1691.00


Available in 1.25", 1.5", 2" and non-sparking.

** Patent Pending **


Please Call for Basin Stud Plates

Remove pumps easily with the FiberGlyde and EZ Glyde Guiderail Systems. Both units offer easy installation with Freeflo proven BERS disconnect. Both units are designed for new installations or station rehabs.

** 175' Max Head **

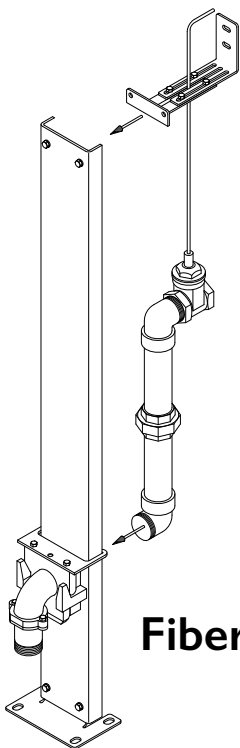

FiberGlyde

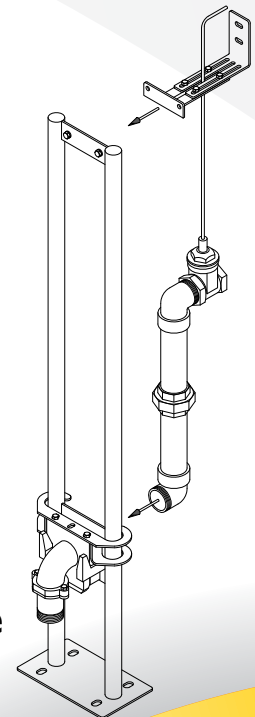

EZ Glyde



BASE ELBOW RAIL SYSTEMS

1.25", 1.50" & 2.00"

DESIGNED FOR SIMPLE INSTALLATION

The Freeflo Base Elbow Rail System is designed for the simple installation and removal of most vertical discharge pumps. Its innovative design allows for pump service without the need to disconnect plumbing or physically enter the basin. Flanges available separately, if necessary.



BERS-0125, BERS-0150 or BERS-0200

LIST PRICE: \$699.00

- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Stainless Steel Accessories Standard
- Guide Rail Pins Designed to Accept 0.75" or 1.00" Rails
- Rated for Pumps Weighing Less than 250 lbs
- 2.00" Discharge
- Shipping Weight 42 lbs.



BERS-0125 CV, BERS-0150 CV or BERS-0200 CV

LIST PRICE: \$908.00

- Includes Integral Check Valve in Pull-Out Flange
- Allows for Removal of Check Valve with Pump
- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Stainless Steel Accessories Standard
- Guide Rail Pins Designed to Accept 0.75" or 1.00" Rails
- Rated for Pumps Weighing Less than 250 lbs
- 2.00" Discharge
- Shipping Weight 47 lbs.



BERS-0125 EX, BERS-0150 EX or BERS-0200 EX

LIST PRICE: \$1111.00

BERS-0125 CV EX, BERS-0150 CV EX or BERS-0200 CV EX

LIST PRICE: \$1454.00

- Non-Sparking Design
- Bronze Pull-Out Flange
- Bronze Lower Guide Rail Plate
- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Stainless Steel Accessories Standard
- Guide Rail Pins Designed to Accept 0.75" or 1.00" Rails
- Rated for Pumps Weighing Less than 250 lbs
- 2.00" Discharge
- Shipping Weight 47 lbs.



Visit our webpage at www.ConeryMFG.com for technical data & charts regarding pump compatibility with our base elbows.



BERS-0125 SST, BERS-0150 SST or BERS-0200 SST

LIST PRICE: \$3,885.00

- 316 Stainless Steel Construction
- 316 Stainless Steel Accessories Standard
- Guide Rail Pins Designed to Accept 0.75" or 1.00" Rails
- Rated for Pumps Weighing Less than 250 lbs
- 2.00" NPT Discharge
- Shipping Weight 42 lbs.



BERS-300H SST, BERS-300V SST

LIST PRICE: 300H \$5,291.00 300V \$5,622.00
325H \$5,491.00 320V \$5,755.00

- 316 Stainless Steel Construction
- 316 Stainless Steel Accessories Standard
- Guide Rail Pins Designed to Accept 0.75", 1.00" or 1.25" Rails
- Rated for Pumps Weighing Less than 400 lbs
- 3.00" NPT Discharge
- Shipping Weight: 300H, 60 lbs., 300V, 70 lbs.



BERS-0400 SST, BERS-0430 SST

LIST PRICE: \$10,454.00

- 316 Stainless Steel Construction
- 316 Stainless Steel Accessories Standard
- Guide Rail Pins Designed to Accept 1.50" or 2.00" Rails
- Rated for Pumps Weighing Less than 2000 lbs
- 4.00" Flanged Discharge
- Shipping Weight 130 lbs.



316 SST UPPER GUIDE RAIL BRACKETS

UGB-STNLS 316	\$295.00
UGB-0150 316	\$405.00
UGB-0200 316	\$405.00
UGB-0300 316	\$503.00



316 SST INTERMEDIATE GUIDE RAIL BRACKETS

IGB-0100 316	\$411.00
IGB-0125 316	\$411.00
IGB-0150 316	\$411.00
IGB-0200 316	\$495.00
IGB-0300 316	\$566.00



3.00" BASE ELBOW RAIL SYSTEMS

The BERS-0300 Base Elbow Rail System is designed for the simple installation and removal of most 3.00" vertical or horizontal discharge pumps. Its innovative design allows for pump service without the need to disconnect plumbing or physically enter the basin.



BERS-0300 V, BERS-0320 V

LIST PRICE: \$1,354.00

BERS-0300 VEX, BERS-0320 VEX

LIST PRICE: \$2,260.00

- Designed for Vertical Discharge Pumps
- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Guide Rail Pins Designed to Accept 0.75", 1.00", or 1.25" Rails
- Rated for Pumps Weighing Less than 400 lbs
- 3.00" Discharge
- BERS-0320V = 3.00" x 2.00" Pump Adapter Flange
- Shipping Weight 70 lbs.



BERS-0300 H, BERS-0325 H

BERS-0300 HF, BERS-0325 HF

LIST PRICE: \$1,354.00

- Designed for Horizontal Discharge Pumps
- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Guide Rail Pins Designed to Accept 0.75", 1.00", or 1.25" Rails
- Rated for Pumps Weighing Less than 400 lbs
- 3.00" Discharge
- BERS-0325 H = 3.00" x 2.50" Pull-Out Flange
- Shipping Weight 60 lbs.



BERS-0300 HEX, BERS-0325 HEX

LIST PRICE: \$2,393.00

- Non-Sparking Design
- Bronze Lower Guide Rail Plate
- Designed for Horizontal Discharge Pumps
- Ductile Iron Construction
- Powder Coated for Corrosion Resistance
- Guide Rail Pins Designed to Accept 0.75", 1.00", or 1.25" Rails
- Rated for Pumps Weighing Less than 400 lbs
- 3.00" Discharge
- BERS-0325 HEX = 3.00" x 2.50" Non-Sparking Pull-Out Flange
- Shipping Weight 60 lbs.

Visit our webpage at www.ConeryMFG.com for technical data & charts regarding pump compatibility with our base elbows. Freeflo base elbows not recommended for use with submersible turbine pumps and submersible well pumps.



**PULL-OUT
FLANGES**



**PULL-OUT
FLANGES**



**PUMP ADAPTER
FLANGES**



**UPPER GUIDE
RAIL BRACKET**
316 SST AVAILABLE



**INTERMEDIATE GUIDE
RAIL BRACKET**
316 SST AVAILABLE



O-RING SETS



PULL-OUT KITS



HPG



SGV



LSG



SRA

ADAPTERS

Item	Description	List Price
POF-0125	Pull-Out Flange For 1.25" Elbow (includes PAF).....	\$ 328.00
POF-0125 CV	Pull-Out Flange For 1.25" Check Valve Elbow (includes PAF).....	567.00
POF-0125 EX	Pull-Out Flange For 1.25" Bronze Non-Sparking Elbow (includes PAF).....	592.00
POF-0125 CV EX	Pull-Out Flange For 1.25" Bronze Non-Sparking Elbow (includes PAF).....	870.00
POF-0150	Pull-Out Flange For 1.50" Elbow (includes PAF).....	328.00
POF-0150 CV	Pull-Out Flange For 1.50" Check Valve Elbow (includes PAF).....	567.00
POF-0150 EX	Pull-Out Flange For 1.50" Bronze Non-Sparking Elbow (includes PAF).....	592.00
POF-0150 CV EX	Pull-Out Flange For 1.50" Bronze Non-Sparking Elbow (includes PAF).....	870.00
POF-0200	Pull-Out Flange For 2.00" Elbow (includes PAF).....	328.00
POF-0200 CV	Pull-Out Flange For 2.00" Check Valve Elbow (includes PAF).....	567.00
POF-0200 EX	Pull-Out Flange For 2.00" Bronze Non-Sparking Elbow (includes PAF).....	592.00
POF-0200 CV EX	Pull-Out Flange For 2.00" Bronze Non-Sparking Elbow (includes PAF).....	870.00
POF-0300 H	Pull-Out Flange For 3.00" Horizontal Elbow.....	617.00
POF-0300 HEX	Pull-Out Flange For 3.00" Bronze Non-Sparking Horizontal Elbow.....	1,420.00
POF-0325 H	Pull-Out Flange For 3.00" X 2.50" Horizontal Elbow.....	617.00
POF-0325 HEX	Pull-Out Flange For 3.00" X 2.50" Non-Sparking Horizontal Elbow.....	1,420.00
POF-0300 V	Pull-Out Flange For 3.00" Vertical Elbow (includes PAF).....	599.00
POF-0300 VEX	Pull-Out Flange For 3.00" Non-Sparking Vertical Elbow (includes PAF).....	1,420.00
POF-0320 V	Pull-Out Flange For 3.00" X 2.00" Vertical Elbow (includes PAF).....	599.00
POF-0320 VEX	Pull-Out Flange For 3.00" X 2.00" Non-Sparking Vertical Elbow (includes PAF).....	1,420.00
PAF-0125	1.25" SS Pump Adapter Flange.....	125.00
PAF-0150	1.50" SS Pump Adapter Flange.....	134.00
PAF-0200	2.00" SS Pump Adapter Flange.....	141.00
PAF-0300	3.00" SS Pump Adapter Flange.....	201.00
PAF-0320	3.00" X 2.00" SS Pump Adapter Flange.....	201.00
UGB-STNLS	SS Upper Guide Bracket For Rail Sizes 0.75", 1.00", 1.25".....	192.00
UGB-PC	Powder Coated Steel Upper Guide Bracket.....	92.00
IGB-0075	SS Intermediate Guide Bracket For 0.75" Rail.....	296.00
IGB-0100	304 SST Intermediate Guide Bracket For 1.00" Rail.....	296.00
IGB-0125	304 SST Intermediate Guide Bracket For 1.25" Rail.....	296.00
LGRP-0200	304 SST Lower Guide Plate For Elbows 1.25"-2.00" Discharge.....	143.00
LGRP-0300	SS Lower Guide Plate For Elbows 3.00" Discharge.....	143.00
O-Ring-0200	O-Ring Set For 1.25"-2.00" Elbows.....	16.00
O-Ring-0300	O-Ring Set For 3.00" Vertical Elbows.....	19.00
POK-0300	Hardware & Gasket Kit For 3.00" Horizontal Elbows.....	102.00
POK-0325	Hardware & Gasket Kit For 3.25" Horizontal Elbows.....	102.00
HPG Spacer	Optional Spacer Kit For HPG Grinder Pumps.....	52.00
SGV Adapter	Optional Mounting Kit For Barnes SGV 1.25" Grinder Pumps.....	40.00
SRA Adapter	Myers SRA Rail System.....	95.00
LSG Adapter	Mounting Elbow for Liberty LSG Grinder Pumps.....	54.00
HFA-0200	2" Flange to 2" Vertical Elbow.....	147.00

BASE ELBOW RAIL SYSTEMS

4.00", 6.00" & 8.00"

The BERS-0400, BERS-0600 and BERS-0800 Base Elbow Rail System is designed for engineered pump stations with flanged discharges and pull-outs to accommodate larger pumps. Its innovative design allows for pump service without the need to disconnect plumbing. Pull-out flanges for base elbows can be modified to accommodate unique pump bolt patterns. Please call for pricing & information.

PRODUCT FEATURES

- Ductile iron construction
- Powder coated for corrosion resistance
- Metal-to-Metal design with stainless steel breakaway ring
- Flygt Adaptable
- POF's are Flygt Adaptable



BERS-0400, BERS-0430

LIST PRICE: \$1,806.00

- Guide rail pins designed to accept 1.50" or 2.00" rails (Call for 3")
- Heavy duty rubber gasket available (alternate seal)
- Rated for pumps weighing less than 2,000 lbs
- 4.00" flanged discharge
- BERS-0430 = 4.00" x 3.00" Pull-Out Flange
- Shipping Weight 136 lbs.



BERS-0400 HEX, BERS-0430 HEX

LIST PRICE: \$2,611.00

- Non-Sparking Design



BERS-0600, BERS-0640

LIST PRICE: \$2,128.00

- Guide rail pins designed to accept 2.00" rails (Call for 3")
- Heavy duty rubber gasket available (alternate seal)
- Rated for pumps weighing less than 2,000 lbs
- 6.00" flanged discharge
- BERS-0640 = 6.00" x 4.00" Pull-Out Flange
- Shipping Weight 185 lbs.
- **Please add SP-600 for Flygt compatibility**



BERS-0600 HEX, BERS-0640 HEX

LIST PRICE: \$3,695.00

- Non-Sparking Design



BERS-0800, BERS-0860

LIST PRICE: \$3,390.00

- Guide rail pins designed to accept 2.00" or 3.00" rails
- Rated for pumps weighing less than 4,000 lbs
- 8.00" flanged discharge
- BERS-0860 = 8.00" x 6.00" Pull-Out Flange
- Shipping Weight 310 lbs.

BERS-0800 HEX, BERS-0860 HEX

LIST PRICE: \$5,401.00

- Non-Sparking Design

Visit our webpage at www.ConeryMFG.com for technical data & charts regarding pump compatibility with our base elbows.
Freeflo base elbows not recommended for use with submersible turbine pumps and submersible well pumps.



PULL-OUT FLANGES



PULL-OUT FLANGES



PULL-OUT FLANGES



UPPER GUIDE RAIL BRACKET



FULL GASKETS



SS SEALING GASKETS



WEDGE ANCHORS 304 SST



PULL-OUT KITS



INTERMEDIATE GUIDE RAIL BRACKET

<i>Item</i>	<i>Description</i>	<i>List Price</i>
POF-0400	Pull-Out Flange For 4.00" Elbow.....	\$ 800.00
POF-0430	Pull-Out Flange For 4.00" X 3.00" Elbow.....	800.00
POF-0400 HEX	Pull-Out Flange For 4.00" Non-Sparking Elbow.....	1,268.00
POF-0430 HEX	Pull-Out Flange For 4.00" X 3.00" Non-Sparking Elbow.....	1,268.00
POF-0600*	Pull-Out Flange For 6.00" Elbow (*Add SP-0600-F for FLYGT Systems).....	997.00
POF-0640*	Pull-Out Flange For 6.00" X 4.00" Elbow (*Add SP-0600-F for FLYGT Systems).....	997.00
POF-0600 HEX*	Pull-Out Flange For 6.00" Non-Sparking Elbow (*Add SP-0600-Bronze for FLYGT Systems).....	1,710.00
POF-0640 HEX*	Pull-Out Flange For 6.00" X 4.00" Non-Sparking Elbow (*Add SP-0600-Bronze for FLYGT Systems).....	1,710.00
POF-0800	Pull-Out Flange For 8.00" Elbow.....	1,540.00
POF-0860	Pull-Out Flange For 8.00" X 6.00" Elbow.....	1,540.00
POF-0800 HEX	Pull-Out Flange For 8.00" Non-Sparking Elbow.....	3,818.00
SP-0600-F	Sealing Ring for FLYGT Compatibility.....	112.00
SP-0600-Bronze	Bronze Sealing Ring for FLYGT Compatibility.....	360.00
UGB-0150	SS Upper Guide Bracket For 1.50" Rail.....	241.50
UGB-0200	SS Upper Guide Bracket For 2.00" Rail.....	241.50
UGB-0200-8	SS Upper Guide Bracket For 2.00" Rail for BERS-0800.....	363.00
UGB-0300	SS Upper Guide Bracket For 3.00" Rail.....	354.00
UGB-0150/0200 REP KIT	Replacement Hardware For UGB-0150/UGB-0200.....	50.00/50.00
IGB-0200-4"	SS Intermediate Guide Bracket For 4.00" Discharge.....	326.00
IGB-0200-6"	SS Intermediate Guide Bracket For 6.00" Discharge.....	326.00
IGB-0200-8"	SS Intermediate Guide Bracket For 8.00" Discharge.....	326.00
POK-0400	Hardware & Gasket Kit For 4.00" Elbows.....	130.00
POK-0600	Hardware & Gasket Kit For 6.00" Elbows.....	140.00
FG-0400	Full Gasket For 4.00" Elbow.....	44.00
FG-0600	Full Gasket For 6.00" Elbow.....	52.00
SR-0400	Stainless Sealing Ring For 4.00" Elbow.....	62.00
Wedge 1/4	Wedge Anchor - 1/4" x 2 ^{1/4} ", 304 SST - Use with Float Brackets and UGBs.....	3.62
Wedge 3/8	Wedge Anchor - 3/8" x 2 ^{3/4} ", 304 SST - Use with BERS-0125 - BERS-0200.....	5.51
Wedge 1/2	Wedge Anchor - 1/2" x 2 ^{3/4} ", 304 SST - Use with BERS-0300 - BERS-0400.....	8.51
Wedge 3/4	Wedge Anchor - 3/4" x 4 ^{3/4} ", 304 SST - Use with BERS-0600 - BERS-0800.....	23.05

NEW!

EZR SYSTEM REPLACEMENT FLANGES & ACCESSORIES



Designed to work with existing systems, the flanges and accessories allow for replacement of worn parts without requiring the removal of the Base Elbow itself, eliminating the need to enter the basin or replumb the entire station.



EZR PULL-OUT FLANGES



EZR PULL-OUT FLANGES WITH CHECK VALVE



EZR SPECIALTY PUMP ADAPTER (SGV)



EZR PULL-OUT FLANGES NON-SPARKING DESIGN



EZR PUMP ADAPTER FLANGES



EZR REPLACEMENT LOWER GUIDE PLATES

EZR PULL-OUT FLANGES (NON-SPARKING AVAILABLE)

Item	Description	List Price
EZR-POF-0125	1.25" Replacement Pull-Out Flange (includes PAF)	\$ 416.00
EZR-POF-0125 SGV	1.25" Replacement Pull-Out Flange for SVG Grinder Pumps (includes PAF)	416.00
EZR-POF-0125 CV	1.25" Replacement Check Valve Pull-Out Flange (includes PAF).....	655.00
EZR-POF-0125 CV SGV	1.25" Replacement Check Valve Pull-Out Flange for SVG Grinder Pumps (includes PAF)	655.00
EZR-POF-0150	1.50" Replacement Pull-Out Flange (includes PAF)	416.00
EZR-POF-0150 CV	1.50" Replacement Check Valve Pull-Out Flange (includes PAF).....	655.00
EZR-POF-0200	2.00" Replacement Pull-Out Flange (includes PAF)	416.00
EZR-POF-0200 CV	2.00" Replacement Check Valve Pull-Out Flange (includes PAF)	655.00
EZR-POF-0300 H	3.00" Horizontal Replacement Pull-Out Flange.....	719.00

EZR PUMP ADAPTER FLANGES


Item	Description	List Price
EZR-PAF-0125	1.25" Pump Adapter	145.00
EZR-PAF-0150	1.50" Pump Adapter	153.00
EZR-PAF-0200	2.00" Pump Adapter.....	160.00

ADDITIONAL ACCESSORIES

Item	Description	List Price
EZR-LGRP	SS Lower Guide Rail Plate for 1.25" - 3.00" Systems.....	153.00

Brackets are designed to keep multiple float switches organized within the basin. All brackets are made of Type 304 stainless steel and come with black cord snubbers to securely attach float cables. As an option, liquid tight cord grips are also available for the same purpose. Additional hook type style brackets are also available. Additionally, the T-shaped bracket styles are supplied with a mounting piece so that the bracket itself may be easily removed from the basin with the floats still attached.

**CALL FOR
316 SST
PRICING**

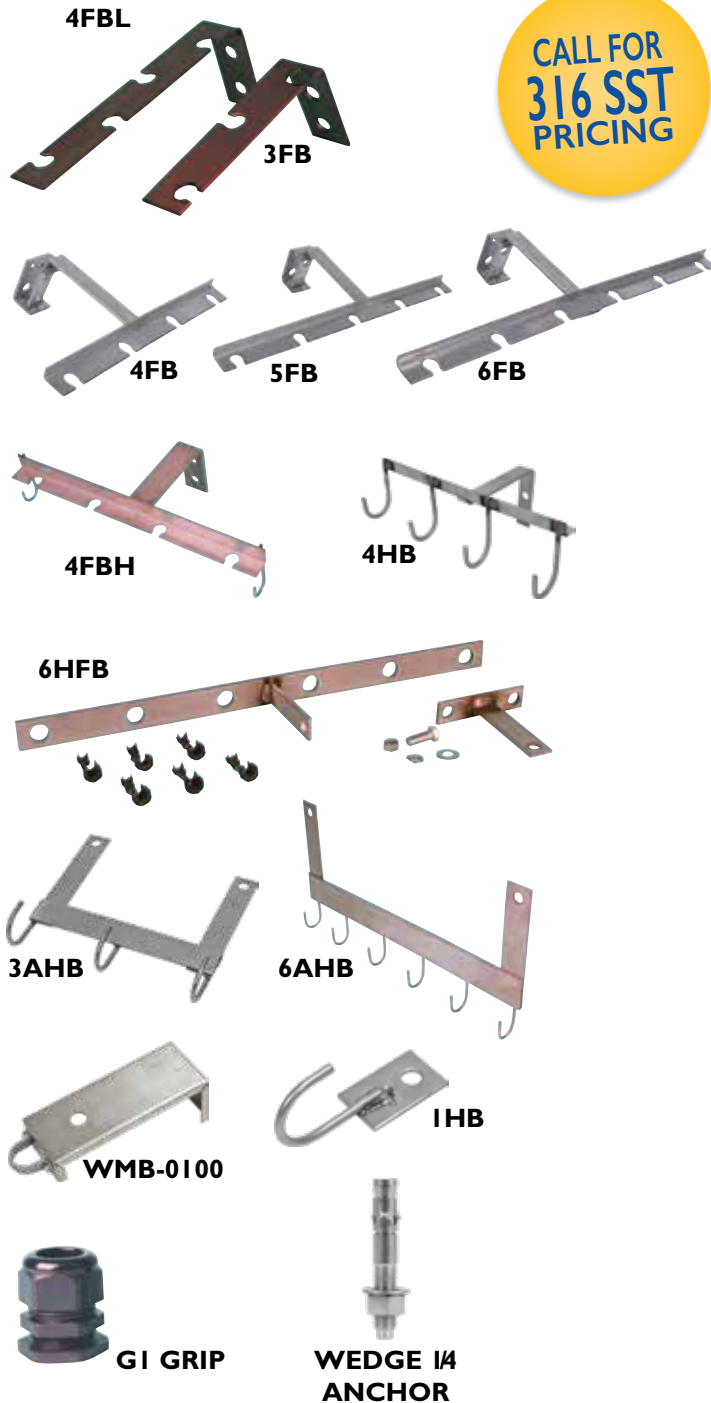

L-TYPE BRACKETS

List Price

3FB.....	\$ 60.50
4FBL	70.50

T-TYPE BRACKETS

4FB	76.00
5FB.....	90.00
6FB.....	90.00

T-TYPE BRACKETS W/SIDE HOOKS

4FBH.....	82.75
5FBH	101.00
6FBH	105.00
4HB	80.00
6HB.....	92.00

H-TYPE BRACKETS

4HFB	105.00
6HFB	120.00

U-TYPE BRACKET

3AHB	85.00
4AHB	104.00
6AHB	115.00
4SFB.....	76.00
5SFB.....	90.00
6SFB.....	95.00

SPECIALTY TYPE BRACKETS

WMB-100.....	75.50
1HB - 75 lb. max.....	34.50
1HBXL - over 75 lb.	52.00

OPTIONAL CORD GRIPS

G1	5.50
----------	------

Note: To add cord grips to your float bracket order, simply specify G1 after the part number. You will receive the number of cord grips that fit each respective float bracket.

WEDGE ANCHORS

Wedge Anchor - 1/4" x 2 1/4", 304 SST - Use with Float Brackets	3.65
---	------

Please Call for Custom Brackets







CONTROL SWITCHES

Control Switch	Type of Activation	Description	Electrical Rating
 2900-B1S1	Mercury	Foam Filled Mercury	10 Amp
 2900-B2S1 (Mini)	Mercury	Foam Filled Mini Mercury	10 Amp
 2900-B8S1	Mechanical	Foam Filled Mechanical	10 Amp
 2900-B8S1 GC	Mechanical	Gold Contact for Intrinsically Safe Relays	10 Amp
 2900-B4S1	Mercury	Foam Filled, Internally Weighted	10 Amp
 2900-B6S1	Mechanical	Foam Filled, Internally Weighted	10 Amp
 SF20NO	Mercury	304 SS High Temp Mercury Float	10 Amp
 SF-MECH	Mechanical	316 SS Mechanical Float Standard Temperature	10 Amp

2900 = Normally Open
 2901 = Normally Closed
 2902 = SPDT

Mounting Options

C1 = Cord Weight
 C3 = SS Clamp for Pipe Mount
 C4 = Resealable Tie Strap
 C7 = Float Collar for 1.00" Pipe Mount

Pump Switch	Type of Activation	Description	Pump Draw	
	2900-B1S4	Mercury	Foam Filled Mercury	1/2 HP 13 Amp
	2900-B2S4 (Mini)	Mercury	Foam Filled Mini Mercury	1/2 HP 13 Amp
	2900-B8S4	Mechanical	Foam Filled Mechanical	1/2 HP 13 Amp
	2900-B8S6	Mechanical	Foam Filled Mechanical	1 HP @ 120V 2 HP @ 240V 15 Amp
	2900-B4S4	Mercury	Internally Weighted	1/2 HP 15 Amp
	2900-B6S4	Mechanical	Internally Weighted	1/2 HP 13 Amp
	VERTICAL SWITCH	Mechanical	Vertical Float Switch	10 Amp
	DOUBLE FLOAT	Mechanical	Double Float Switch	1 HP @ 120 V 15 Amp

2900 = Normally Open
 2901 = Normally Closed
 2902 = SPDT

Mounting Options

C1 = Cord Weight
 C3 = SS Clamp for Pipe Mount
 C4 = Resealable Tie Strap
 C7 = Float Collar for 1.00" Pipe Mount

CONTROL DUTY MERCURY FLOAT SWITCH

NARROW ANGLE



B1 and B2

- Pear Shaped Bulb
- Standard and Mini
- Available for 24 hour shipment in all cable lengths

Designed for accurate liquid level control in many applications including sewage and wastewater environments. The durable construction provides for leak-proof operation and tremendous impact resistance.

Operating Options

NORMALLY OPEN (N/O) - YELLOW BULB... FOR PUMP DOWN APPLICATIONS

The mercury switch activates (contacts close) as the float rises 1.00" or 5 degrees above horizontal.

NORMALLY CLOSED (N/C) - RED BULB... FOR PUMP UP APPLICATIONS

The mercury switch de-activates (contacts open) as the float rises 1.00" or 5 degrees above horizontal.

SINGLE POLE, DOUBLE THROW (SPDT) - BLUE BULB... NORMALLY OPEN OR NORMALLY CLOSED

A variation on the standard normally open or normally closed float switch, this float may be wired at installation to perform either operation but not both.

Specifications - Float & Cable

B1 Bulb (Std) Style Is 3.50" X 5.00"
B2 Bulb (Mini) Style Is 3.00" X 3.75"
Durable Polypropylene Shell
Solid Polyurethane Foam Filling
1.52g Mercury Tilt Switch
Operating Temperature Of 32-170 F
Chlorinated Polyethylene Cable
SJ00W-300 Volt - 18/2 Cable
SJ00W-300 Volt - 18/3 Cable For Spdt Design


Mounting Options

C1 - Zinc Plated, Cast-Iron Cord Weight (1.22 Lbs)
C3 - SS Clamp For Pipe Mount
C4 - Releasable Poly Tie Strap
C7 - Float Collar For 1.00" Pipe Mount

Specifications - Electrical

Rated For 10 Amps @ 120 VAC
Rated For 3 Amps @ 240 VAC
Usable With 12-24 VDC Applications
Not For Use With 460 Volt Applications

Available For Use With Intrinsically Safe Circuits When Used With Proper Relays.

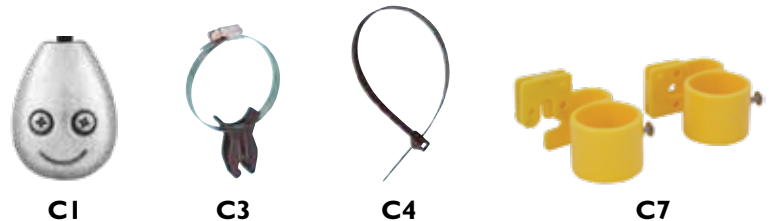



B8



- Pear Shaped Bulb
- Newest Mechanical Design
- Now in Standard Bulb
- Available for 48 hour shipment in all cable lengths

Designed for accurate liquid level control in nearly any application, including potable water, industrial, sewage and wastewater environments. The durable outer shell and foam filled interior provide for leak-proof operation and tremendous impact resistance.

Operating Options

NORMALLY OPEN (N/O) - GREEN BULB... FOR PUMP DOWN APPLICATIONS

The mechanical switch activates (contacts close) as the float rises 1.00" or 5 degrees above horizontal.

NORMALLY CLOSED (N/C) - GREEN/RED BULB... FOR PUMP UP APPLICATIONS

The mechanical switch de-activates (contacts open) as the float rises 1.00" or 5 degrees above horizontal.

SINGLE POLE, DOUBLE THROW (SPDT) - GREEN/BLUE BULB... NORMALLY OPEN OR NORMALLY CLOSED

A variation on the standard normally open or normally closed float switch, this float may be wired at installation to perform either operation but not both.

Specifications - Float & Cable

B8 Bulb Style Is 3.50" X 5.00"
 Durable Polypropylene Shell
 Solid Polyurethane Foam Filling
 Mechanically Activated Micro-Switch
 Non - Mercury Design
 Operating Temperature Of 32-170 F
 Chlorinated Polyethylene Cable
 SJ00W-300 Volt - 18/2 Cable
 SJ00W-300 Volt - 18/3 Cable For Spdt Design

Specifications - Electrical


Rated For 10 Amps @ 120 VAC
 Rated For 3 Amps @ 240 VAC
 Not For Use With 460 Volt Applications



Gold Contacts (GC) \$20 net adder. Must be added for Intrinsically Safe Applications.

Mounting Options

C1 - Zinc Plated, Cast-Iron Cord Weight (1.22 Lbs)
 C3 - SS Clamp For Pipe Mount
 C4 - Releasable Poly Tie Strap
 C7 - Float Collar For 1.00" Pipe Mount

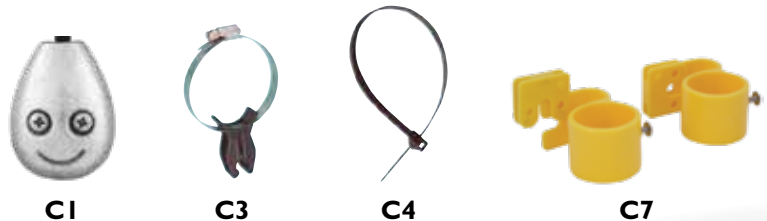

CONTROL DUTY INTERNALLY WEIGHTED MERCURY & NON-MERCURY FLOAT SWITCH



B4 Non-Mercury B6

- Dura-Float Design Internally Weighted
- Heavy-Duty Construction for the Toughest Application
- B4 - Foam Filled

Designed for accurate liquid level control in many applications including sewage and wastewater environments. The durable construction provides for leak-proof operation and tremendous impact resistance.

Operating Options

NORMALLY OPEN (N/O) - BLACK BULB... FOR PUMP DOWN APPLICATIONS

The mercury switch activates (contacts close) as the float rises 1.00" or 5 degrees above horizontal.

SINGLE POLE, DOUBLE THROW (SPDT) - BLACK BULB... NORMALLY OPEN OR NORMALLY CLOSED

A variation on the standard normally open or normally closed float switch, this float may be wired at installation to perform either operation but not both.

Specifications - Float & Cable

B4 Bulb Style Is 4.25" X 6.00"
B5 Bulb Style Is 4.25" X 6.00"
Durable Polypropylene Shell
Solid Polyurethane Foam Filling (B4 Style)
1.52g Mercury Tilt Switch
Operating Temperature Of 32-170 F
Chlorinated Polyethylene Cable
Sjooow-300 Volt - 18/2 Cable
Sjooow-300 Volt - 18/3 Cable For Spdt Design

Specifications - Electrical

Rated For 10 Amps @ 120VAC
Rated For 3 Amps @ 240 VAC
Usable With 12-24 VDC Applications
Not For Use With 460 Volt Applications

Available For Use With Intrinsically Safe
Circuits When Used With Proper Relays.

Non-Mercury B6

Gold Contacts (GC) Must be added for
Intrinsically Safe Applications



Mounting Options

WMB-0100... Separate Item Listed In Brackets
Custom Bracket Designed Specifically For
Use With Dura-Floats Allows For Additional
Mounting Options Including Float Poles.





SF Mercury & Non-Mercury

- Stainless Steel Float Switch
- Super Durable Float for High Temperature (Mercury) & Chemical Applications

Designed for accurate liquid level control in many applications including chemical wash tanks, violent applications, high temperatures (Mercury), or sewage environments. This float's rugged stainless steel construction and heavy duty cable make it ideal for the most difficult float application.



Operating Options

NORMALLY OPEN (N/O) - SS BULB... FOR PUMP DOWN APPLICATIONS

The mercury switch activates (contacts close) as the float rises 1.00" or 5 degrees above horizontal.

NORMALLY CLOSED (N/C) - SS BULB... FOR PUMP UP APPLICATIONS

The mercury switch activates (contacts open) as the float rises 1.00" or 5 degrees above horizontal.

Specifications - Float & Cable

4.175" x 5.260" Stainless Steel Housing
 Mercury Operating Temperature of 32°-221° F
 Mechanical Operating Temperature of 32°-170° F
 Chlorinated Polyethylene Cable
 SOOW-600 Volt - 14/3 Cable
 Mounting Bracket Included



SF Mercury Specifications - Electrical

Float Rated For 10 Amps @ 120 VAC
 Rated For 3 Amps @ 240 VAC
 Usable With 12-24 VDC Applications
 Not For Use With 460 Volt Applications
 Available For Use With Intrinsically Safe
 Circuits When Used With Proper Relays.

Non-Mercury (Mechanical)

Rated For 1 Amp @ 120 VAC

Mounting Options

WMB-0100... Separate Item Listed In Brackets
 Custom Bracket that allows for simple float pole
 installation. Can be used in conjunction with supplied
 mounting equipment as an option.



PUMP DUTY MERCURY FLOAT SWITCH

WIDE ANGLE



B1 and B2

- Pear Shaped Bulb
- Standard and Mini
- Available for 24 hour shipment in all cable lengths

Designed for accurate liquid level control in many applications including sewage and wastewater environments. Designed to handle direct pump control for sump pumps and other sewage ejectors with piggyback plug option available. The durable construction provides for leak-proof operation and tremendous impact resistance.

Operating Options

NORMALLY OPEN (N/O) - YELLOW BULB... FOR PUMP DOWN APPLICATIONS

The mercury switch contacts are open (or off) in the hanging position. As the float rises 45 degrees above horizontal, the contacts close and actuate the switch. The contacts then remain closed until the float switch returns to 45 degrees below horizontal.

NORMALLY CLOSED (N/C) - RED BULB... FOR PUMP UP APPLICATIONS

The mercury switch contacts are closed (or on) in the hanging position. As the float rises 45 degrees above horizontal, the contacts close and actuate the switch. The contacts then remain open until the float switch returns to 45 degrees below horizontal.

SINGLE POLE, DOUBLE THROW (SPDT) - BLUE BULB... NORMALLY OPEN OR NORMALLY CLOSED

A variation on the standard normally open or normally closed float switch, this float may be wired at installation to perform either operation but not both.

Specifications - Float & Cable

B1 Bulb (Std) Style Is 3.50" X 5.00"
 B2 Bulb (Mini) Style Is 3.00" X 3.75"
 Durable Polypropylene Shell
 Solid Polyurethane Foam Filling
 Wide Angle Mercury Tilt Switch
 Operating Temperature Of 32-170 F
 Chlorinated Polyethylene Cable
 SJ00W-300 Volt - 16/2 Cable
 SJ00W-300 Volt - 16/3 Cable For Spdt Design




Specifications - Electrical

Rated For 13 Amps @ 120 VAC, 1/2 HP
 Rated For 13 Amps @ 240 VAC, 1HP
 Not For Use With 460 Volt Applications

Piggyback Plug Options

P1 - 120 Volt Piggyback Plug
 P2 - 230 Volt Piggyback Plug



Mounting Options

C1 - Zinc Plated, Cast-Iron Cord Weight (1.22 Lbs)
 C3 - SS Clamp For Pipe Mount
 C4 - Releasable Poly Tie Strap
 C7 - Float Collar For 1.00" Pipe Mount



C1



C3



C4



C7



B8 - S4, S6



- Pear Shaped Bulb
- Newest Mechanical Design
- Now in Standard Bulb
- Available for 48 hour shipment in all cable lengths

Designed for accurate liquid level control in many applications including sewage and wastewater environments. Designed to handle direct pump control for sump pumps and other sewage ejectors with piggyback plug option available. The durable construction provides for leak-proof operation and tremendous impact resistance.

Operating Options

NORMALLY OPEN (N/O) - GREEN BULB... FOR PUMP DOWN APPLICATIONS

The mechanical switch contacts are open (or off) in the hanging position. As the float rises 45 degrees above horizontal, the contacts close and actuate the switch. The contacts then remain closed until the float switch returns to 45 degrees below horizontal.

NORMALLY CLOSED (N/C) - GREEN/RED BULB... FOR PUMP UP APPLICATIONS

The mechanical switch contacts are closed (or on) in the hanging position. As the float rises 45 degrees above horizontal, the contacts open and actuate the switch. The contacts then remain open until the float switch returns to 45 degrees below horizontal.

SINGLE POLE, DOUBLE THROW (SPDT) - GREEN/BLUE BULB... NORMALLY OPEN OR NORMALLY CLOSED

A variation on the standard normally open or normally closed float switch, this float may be wired at installation to perform either operation but not both. Available in B1 bulb size only.

Specifications - Float & Cable

- B8 Bulb (Std) Style Is 3.50" X 5.00"
- Durable Polypropylene Shell
- Solid Polyurethane Foam Filling
- Mechanically Activated Mircoswitch
- Non-Mercury Design
- Operating Temperature Of 32-170 F
- Chlorinated Polyethylene Cable
- SJOOW-300 Volt - 16/2 Cable
- SJOOW-300 Volt - 16/3 Cable For Spdt Design




Specifications - Electrical

- S4 - Rated For 13 Amps @ 120 VAC, 1/2 HP
- S4 - Rated For 13 Amps @ 230 VAC, 1HP
- S6 - Rated For 15 Amps @ 120 VAC, 1HP
- S6 - Rated For 15 Amps @ 230 VAC, 2HP
- Not For Use With 460 Volt Applications
- Not rated for 12-24V DC

Piggyback Plug Options

- P1 - 120 Volt Piggyback Plug
- P2 - 230 Volt Piggyback Plug



Mounting Options

- C1 - Zinc Plated, Cast-Iron Cord Weight (1.22 Lbs)
- C3 - SS Clamp For Pipe Mount
- C4 - Releasable Poly Tie Strap
- C7 - Float Collar For 1.00" Pipe Mount



C1



C3



C4



C7

FLOAT SWITCH PART NUMBER & PRICE WORKSHEET

Instructions:

- Fill in the shaded blanks in the boxes below to determine exact part number (please note that many abbreviations are used—refer to catalog for complete descriptions)
- Reference the cost amounts below each letter/number designation to build the exact price
- Using the multiplier table (below & left), determine the quantity discount for net price
- Stainless floats & vertical floats have their own charts

FLOAT SWITCH ORIENTATION	BULB TYPE	SWITCH TYPE	PIGGYBACK PLUG	CORD ASSEMBLY	PACKAGING	CABLE LENGTH (IN 5' INCREMENTS)
REQUIRED	REQUIRED	REQUIRED	(OPTIONAL)	(OPTIONAL)	(OPTIONAL)	REQUIRED

	B		S		P		C		K		15' STANDARD
--	----------	--	----------	--	----------	--	----------	--	----------	--	---------------------

\$59.00 - 2900 NORMALLY OPEN	\$6.50 1 STD BULB - MERC	\$0.00 - 1 NARROW ANGLE	\$11.00 - 1 120V PLUG	\$10.25 - 1 CORD WEIGHT	\$3.75 - 1 IND BOXED	(\$2.00) - - 5' ANY TYPE FLOAT
\$59.00 - 2901 NORMALLY CLOSED	\$6.50 2 MINI BULB - MERC	\$19.30 - 2 NA - SPDT	\$15.35 - 2 240V PLUG	\$5.75 - 2 CLAMP - POLY	\$3.00 - 2 IND BAGGED	- 15' STANDARD
\$59.00 - 2902 SPDT	\$2.90 3 MECHANICAL BULB	\$10.30 - 3 NA - 600V	(PLUGS USABLE ON WIDE ANGLE FLOATS ONLY)	\$7.70 - 3 CLAMP - STNLS		\$8.20 - + 5' S1, S4, S14, 20 AMP
	\$21.00 4 INT WTD BULB	\$14.35 - 4 WIDE ANGLE		\$7.70 - 31 CLAMP - SM STNLS		\$12.50 - + 5' S2, S5
	MERCURY FOAM FILLED	\$23.50 - 5 WA - SPDT		\$5.75 - 4 RLS TIE STRAP		\$13.00 - + 5' S3, S6
	\$17.25 6 INT WTD BULB	\$31.75 - 6 WA-2HP MECH		\$7.75 - 7 FLOAT COLLAR		
	MECHANICAL FOAM FILLED					
	\$2.90 8 STANDARD BULB					
	MECHANICAL FOAM FILLED					

MECHANICAL FLOAT

Add Gold Contact (GC) for Intrinsically Safe Applications
\$20.00 Net Adder

STAINLESS STEEL FLOAT SWITCHES

SWITCH TYPE	CABLE LENGTH (IN 10' INCREMENTS)	FLOAT SWITCH ORIENTATION	SWITCH TYPE
REQUIRED	REQUIRED	REQUIRED	(OPTIONAL)

SF (Stainless Float)	20' STANDARD		(NA STANDARD)
--------------------------------	---------------------	--	---------------

\$230.00	\$32.00 - + 10'	NO NORMALLY OPEN	NA NARROW ANGLE
		NC NORMALLY CLOSED	\$16.50 WA WIDE ANGLE

Restocking Fee

Conery Mfg Inc charges a standard 15% restocking fee on approved returned goods.

Minimum Order Fee

Conery Mfg Inc reserves the right to include up to a \$5.00 minimum order fee for orders that are less than \$30.00 before shipping charges.

Shipping Information

Conery Mfg Inc ships all orders via FedEx Ground unless specified to be expedited or shipped by freight with a carrier of our choice. Expediting fees may apply.

Warranty - For full warranty information visit www.coneryMFG.com/warranty.



C10 - Zinc Plated Cord Weight
LIST PRICE: \$15.50



C20 - Pipe Mount w/ Poly Band Assembly
LIST PRICE: \$10.50



C30 - Pipe Mount w/ Stainless Band
LIST PRICE: \$12.25



C31 - Pipe Mount w/ Stainless Band
LIST PRICE: \$12.25



C40 - Releasable Tie
LIST PRICE: \$8.75



C70 - Pipe Mount Float Collar
LIST PRICE: \$12.00

Anchor Kit with CHAIN


AKC-10-3 Type 304 \$309.00

- 1-each 15 lb PVC Coated Yellow Anchor
- 1-each 1/4" Stainless Steel Shackle
- 1-each 5/16" Stainless Steel Shackle
- 3-each Stainless Steel Float Clamps
- 10' of 3/16" Type 304 Stainless Steel Chain

*Additional 3/16" chain Type 304 (per foot) \$12.15

*Additional cable clamps for attaching floats (each) \$14.75

Floats not included.

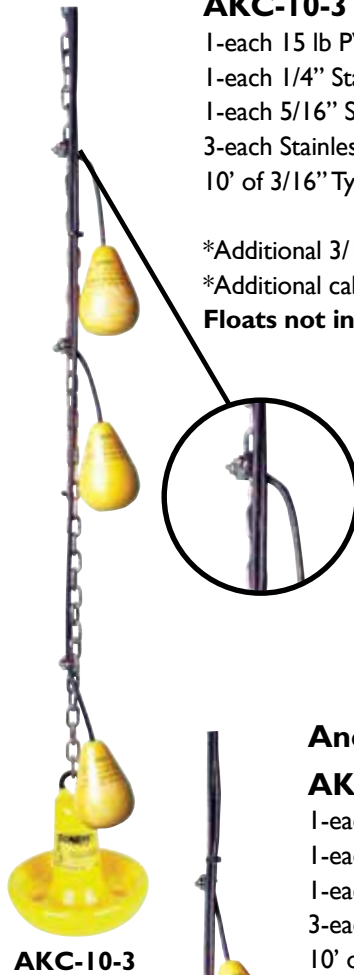

Anchor Kit with Cable

AKR-10-3 Type 304 \$229.50

- 1-each 15 lb PVC Coated Yellow Anchor
- 1-each 1/4" Stainless Steel Shackle
- 1-each 5/16" Stainless Steel Shackle
- 3-each Stainless Steel Float Clamps
- 10' of 1/4" Type 304 Stainless Steel Cable

*Additional 1/4" stainless steel cable (per foot) \$4.65

*Additional cable clamps for attaching floats (each) \$14.75

Floats not included.



CHAIN, CABLE & ACCESSORIES



CUSTOM CHAIN KITS - Call for additional sizes

Part Number	Description	Type 304	Type 316
SS316 - 10-2	3/16" Stainless steel chain kit - 10' of chain & 2-1/4" shackles	\$ 160.50	\$ 194.00
SS140 - 10-2	1/4" Stainless steel chain kit - 10' of chain & 2-5/16" shackles	230.00	287.50
SSC14 - 10-2	1/4" Stainless steel cable kit - 10' of cable & 2-1/4" shackles	140.00	Call for Price

*Add additional chain footage or shackles per the individual list prices noted above
Change the (10) number to actual chain footage Change the (2) number to actual number of shackles

Bulk chain is always available in drum quantities. For quantity use - Please call for up-to-date pricing



STAINLESS STEEL CHAIN - Call for additional sizes



Grade 43 Proof				Type 304	Type 316
Coil Size	Drum Qty (ft)	SWL (lbs)	Wgt/ft (lbs)	(per ft)	(per ft)
1/8"	1,500	600	0.25	\$ 8.95	\$11.25
3/16"	1,500	1,200	0.45	12.15	15.15
1/4"	800	2,600	0.78	19.65	24.50
5/16"	550	3,900	0.97	25.75	30.50
3/8"	400	5,400	1.67	36.50	41.50
1/2"	200	9,200	2.25	63.25	83.75
5/8"		13,000			118.00

STAINLESS STEEL SHACKLES - Call for additional sizes



Size	Fits to Size Chain	SWL (lbs)	Wgt/ea (lbs)	Type 304 (each)	Type 316 (each)
3/16"	1/8"	666	0.07	\$11.25	\$ 13.35
1/4"	3/16"	1,000	0.09	12.65	15.70
5/16"	1/4" and under	1,500	0.15	16.50	19.65
3/8"	5/16" and under	2,000	0.31	18.15	22.25
1/2"	3/8" and under	4,000	0.73	30.50	36.25
5/8"	1/2" and under	6,900	1.26		58.25
3/4"		9,500	1.26		107.25

STAINLESS STEEL QUICK LINK



Size	SWL (lbs)	Wgt/ea (lbs)	Type 304 (each)	Type 316 (each)
3/16"	650	0.06	\$5.35	\$10.60
1/4"	880	0.08	10.50	12.15
5/16"	1,700	0.18	12.65	15.70
3/8"	2,200	0.31	25.25	30.25
1/2"	3,300	0.51	33.50	42.35

TYPE 304 STAINLESS STEEL CABLE



Size	Spool Qty	SWL (lbs)	Wgt/ft (lbs)	List Price (per ft)
1/4"	1,000	1,600	0.11	\$ 4.65
5/16"	1,000	2,250	0.17	9.40

CHAIN & CABLE ACCESSORIES



Description	SWL (lbs)	Wgt/ft (lbs)	List Price (each)
Alloy steel grab link	6,400	1.92	\$ 99.00
Pump Grabber	7,300	4.0	220.00
5/16" - 316 Stainless steel eye bolt	780	0.05	30.00
3/8" - 316 Stainless steel eye bolt	1320	0.07	34.00
1/2" - 316 Stainless steel eye bolt	1320	0.07	40.00
1/4" Stainless steel wire clamp	N/A	0.05	14.75



American Made Chain & Accessories Available Upon Request

The quick disconnect retrofit system easily converts existing basins to use any 1.25" or 2.00" vertical discharge pump. Cast iron horizontal ball valve with stainless steel components. High pressure, oil resistant hose with threaded ends. To install thread the stainless steel flange to the existing gate valve and hook the QDV hose to your pump. Slide your pump into the basin and the QDV over the flange and you are done.



QUICK DISCONNECT VALVE

Item	Description	List Price
QDV 125	1.25" Quick Disconnect Valve.....	\$ 265.00
QDV 200	2.00" Quick Disconnect Valve	562.00
QDV 125 Seal	1.25" Replacement Rubber Flange	26.00
QDV 200 Seal	2.00" Replacement Rubber Flange	39.00



STAINLESS STEEL QUICK DISCONNECT FLANGE


Item	Description	List Price
SFL 125	1.25" Stainless Steel Quick Disconnect Flange	\$ 114.00
SFL 200	2.00" Stainless Steel Quick Disconnect Flange	154.00



QUICK DISCONNECT HOSE

Item	Description	List Price
QDHS 125	1.25" Quick Disconnect Hose (priced per foot)	\$ 50.50
QDHS 200	2.00" Quick Disconnect Hose (priced per foot)	58.00

* Please specify desired length in feet



NEW!

BRONZE & 316 SST GATE VALVES

- Bronze or 316 SST Forged Body
- Each Valve Individually Tested
- Full Port Design

Item	Description	List Price
BGV 125	1.25" Bronze Gate Valve	\$ 64.00
BGV 200	2.00" Bronze Gate Valve	118.00
SSGV 125	1.25" 316 SST Gate Valve	208.00
SSGV 200	2.00" 316 SST Gate Valve	277.00



VALVE HANDLES

Item	Description	List Price
QDVHD 24	24.00" Stainless Steel Threaded Removal Handle	\$ 94.00
QDVHD 36	36.00" Stainless Steel Threaded Removal Handle	126.00
GVE 24	2.00' Stainless Steel Gate Valve Extension Rod	110.25
GVE 36	3.00' Stainless Steel Gate Valve Extension Rod	131.25



CAST IRON BALL CHECK VALVES

Item	Description	List Price
CIBV125	1.25" Ball Check Valve w/tabs	\$145.00
CIBV150	1.50" Ball Check Valve w/tabs	190.00
CIBV200	2.00" Ball Check Valve w/tabs	190.00
CIBC125	1.25" Ball Check Valve w/o tabs.....	143.00
CIBC150	1.50" Ball Check Valve w/o tabs.....	177.00
CIBC200	2.00" Ball Check Valve w/o tabs.....	177.00

TANK VENTS

Green tank vents are ideal for providing vacuum relief and excellent for venting sewer gasses. The epoxy sealed stainless steel screen will eliminate insects from entering the basin. The rigid welded steel construction and the durable powder coated finish slows the corrosion of the components and provides a clean look for installation. Vents may be purchased separately or as a kit with a Schedule 80 PVC close nipple and a fiberglass reinforced plastic flange that is UV resistant.



TANK VENTS

Item	Description	List Price
MGV2	2.00" Vent	\$ 40.00
MGV3	3.00" Vent	90.00
MGV4	4.00" Vent	146.00
MGV6	6.00" Vent	195.00

VENT KITS

(Includes Close Nipple and Fiberglass Flange with Vent)

Item	Description	List Price
MV2KT	2.00" Vent Kit	\$73.50
MV3KT	3.00" Vent Kit	144.00
MV4KT	4.00" Vent Kit	203.00

CLOSE NIPPLES

Item	Description	List Price
CN2	2.00" Schedule 80 PVC Close Nipple	\$14.00
CN3	3.00" Schedule 80 PVC Close Nipple	32.00
CN4	4.00" Schedule 80 PVC Close Nipple	44.00

FIBERGLASS FLANGES

Item	Description	List Price
FL2	2.00" Fiberglass Reinforced Plastic Flange	\$ 23.50
FL3	3.00" Fiberglass Reinforced Plastic Flange	26.50
FL4	4.00" Fiberglass Reinforced Plastic Flange	32.00

ODOR ELIMINATING VENT

Item	Description	List Price
TV2	2.00" Vent	\$ 42.00
CTV2	2.00" Vent with Activated Carbon	56.00
CTVR	Replacement Carbon	19.00

Call for Kit Pricing.

- Non-Corrosive ABS
- EZ Installation
- Eliminates Odors with Activated Carbon
- Snap Top for Media Replacement
- Cost Effective
- Multiple Mounting Options with 2" Adapt-a-flex or 2" Female Fittings



CAST IRON INLET HUB

- Fits Curvature of Basin
- Includes Nuts, Bolts and Washers
- CIH 400/600/800

CIH 400
CIH 600
CIH 800

4.00" Cast Iron Inlet Hub	60.00
6.00" Cast Iron Inlet Hub	98.00
8.00" Cast Iron Inlet Hub	148.00

FIBERGLASS INLET HUB

- Please Specify Basin Diameter
- Includes Nuts, Bolts and Washers
- Includes Rubber Grommet Hub

FG HUB 400 S or L
FG HUB 600 S or L

4.00" FG Inlet Hub S or L	66.00
6.00" FG Inlet Hub S or L	102.00



STAINLESS STEEL FULL COUPLINGS

- Recommended for Discharge Couplings
- Includes Nuts, Bolts, and Washers
- SFC 125/200

SFC 125
SFC 200

1.25" Stainless Steel Full Coupling.....	169.00
2.00" Stainless Steel Full Coupling	221.00
Adder for backplate.....	74.00



PLASTIC FULL COUPLINGS

- Recommended for Electrical Couplings
- Includes Nuts, Bolts, and Washers
- PFC 125/150/200

PFC 125
PFC 150
PFC 200

1.25" Plastic Full Coupling (Nylon)	77.00
1.50" Plastic Full Coupling (Nylon)	77.00
2.00" Plastic Full Coupling (Nylon).....	90.00



ADAPT-A-FLEX FITTING

- Provides Water and Vapor Seal
- No Gaskets or Sealants Required
- Weather and Corrosion Resistant
- AAF 050-640

AAF-050
AAF-075
AAF-100
AAF-125
AAF-150
AAF-200
AAF-300
AAF-435
AAF-440
AAF-635
AAF-640

0.50" Fitting	\$ 775
0.75" Fitting	8.15
1.00" Fitting	8.55
1.25" Fitting	9.25
1.50" Fitting	9.25
2.00" Fitting	9.25
3.00" Fitting	12.00
4.00" Fitting (Schedule 35)	18.75
4.00" Fitting (Schedule 40)	18.75
6.00" Fitting (Schedule 35)	27.25
6.00" Fitting (Schedule 40)	27.25



FLEXIBLE ENTRY HUBS

Flexible entry hubs are an ideal solution to provide sure sealing at pipe entry into the basin.

- Provides Water and Vapor Seal
- No Gaskets or Sealants Required
- Weather and Corrosion Resistant
- Bolts through Basin Wall

Item	Description	List Price
FEH-125	1.25" Boot	\$ 78.25
FEH-150	1.50" Boot	78.25
FEH-200	2.00" Boot	89.00
*FEH-300	3.00" Boot	104.00
*FEH-400	4.00" Boot	114.50
*FEH-600	6.00" Boot	182.00
*FEH-800	8.00" Boot	194.00

* Improved longer bolt length

Outdoor High Water Alarms

Designed to sound an audible alarm and illuminate a 360° red beacon light to notify an alarm situation. Equipped with silence button with automatic reset and individual test button. Includes 15' mechanical float.



EXT15H II Outdoor Alarm

LIST PRICE: \$251.00

- NEMA 4X rated for outdoor use
- Poly Carbonate enclosure (6.0" x 4.0" x 3.5")
- 85 db alarm buzzer
- 120 VAC electrical rating
- Auxiliary contacts (5 AMP max @ 240 VAC)
- Made in USA
- UL Rated
- Pump Operation up to 3/4 HP Pump
- Float Included



JB15H II Outdoor Alarm

LIST PRICE: \$214.00

- NEMA 4X rated for outdoor use
- Poly Carbonate enclosure (6.0" x 4.0" x 3.5")
- 85 db alarm buzzer
- 6' 120 VAC power cord
- Float Included
- Made in USA

Indoor High Water Alarms

Designed to sound an audible alarm and illuminate a red L.E.D. to notify an alarm situation. Equipped with green "power on" L.E.D., test button, and horn/silence switch with auto reset. Includes 15' mechanical float.



BB15H Indoor Alarm

LIST PRICE: \$159.00

- NEMA 1 rated for indoor use
- Non-metallic enclosure (5.500" x 3.750" x 3.750")
- 85 db alarm buzzer
- 6' 120 VAC power cord
- 9 V Battery Back-up



TA15H Indoor Alarm

LIST PRICE: \$148.00

- NEMA 1 rated for indoor use
- Metallic enclosure (6.000" x 4.000" x 2.500")
- 85 db alarm buzzer
- 6' 120 VAC power cord
- External quick connect tabs for float installation

ALARM OPTIONS

Item	Description	List Price
MF	Mercury Float Option	11.00
##	Additional Cable Lenth (Per 5 Ft.)	11.00
C10	Cord Weight	15.00

Adjust "15" in part number to designate actual cord length

Designed to insulate and house electrical wiring for indoor and outdoor applications. Especially well suited for corrosive or chemical environments. Simple installation, light weight, and easy drilling, punching, and cutting in any application. All components used are UL and cUL listed.

Specifications

The 3.50" x 5.50" x 4.00" and the 5.50" x 7.50" x 4.00" junction boxes are made of a durable polypropylene. They are rated for NEMA Types 1, 2, 3, 4X, 6, 6P, 12, and 13 and come standard with hinged lids and captive stainless steel screws with molded mounting feet for easy maintenance and installation. The 8.00" x 8.00" x 4.00" junction box is made of a strong polycarbonate. It is rated for NEMA Types 1, 2, 3, 4X, 6, 12, and 13 and comes standard with a hinged lid and stainless steel screws.



3.5" X 5.5" X 4.0" OPTIONS

Item	Description	List Price
JB 35	NEMA 4X junction box only	\$ 62.00
JB 35A	NEMA 4X junction box with 1 each 1.50" conduit hub and 3 each 0.50" cord grips.....	110.00
JB 35B	NEMA 4X junction box with 1 each 1.50" conduit hub and 4 each 0.50" cord grips	120.00
JB 35C	NEMA 4X junction box with 1 each 1.50" conduit hub and 5 each 0.50" cord grips	127.00
JB 35D	NEMA 4X (Custom) junction box to your specifications.....	CALL



5.5" X 7.5" X 4.0" OPTIONS

Item	Description	List Price
JB 57	NEMA 4X junction box only	\$ 77.00
JB 57A	NEMA 4X junction box with 1 each 1.50" conduit hub and 4 each 0.50" cord grips	140.50
JB 57B	NEMA 4X junction box with 1 each 1.50" conduit hub and 5 each 0.50" cord grips	146.50
JB 57C	NEMA 4X junction box with 1 each 2.00" conduit hub, 4 each 0.50" cord grips & 2 each 0.75" cord grips	171.00
JB 57D	NEMA 4X (Custom) junction box to your specifications	CALL



8.0" X 8.0" X 4.0" OPTIONS

Item	Description	List Price
JB 88	NEMA 4X junction box only	\$ 160.00
JB 88A	NEMA 4X junction box with 1 each 1.50" conduit hub and5 each 0.50" cord grips	227.00
JB 88B	NEMA 4X junction box with 1 each 2.00" conduit hub, 4 each 0.50" cord grips & 2 each 0.75" cord grips	252.00
JB 88C	NEMA 4X (Custom) junction box to your specifications.....	CALL



1" Grip
0.71" - 1.00"
List \$30.50



3/4" Grip
0.45" - 0.71"
List \$14.00



1/2" Grip
0.17" - 0.47"
List \$9.00



UF Grip
12/2 & 12/3 - AWG flat wires
List \$19.00

LIQUID TIGHT CORD GRIPS

CONDUIT HUBS

1.50" List \$10.50
2.00" 15.25



CONERY TEAM



MIKE BEKELESKI

SALES MANAGER

mikeb@conerymfg.com



JEN HUNT

ACCOUNTS RECEIVABLE /
CUSTOMER SERVICE

jhunt@conerymfg.com



TIM SWAISGOOD

GENERAL MANAGER

tswaisgood@conerymfg.com



BAILEY SMITH

CUSTOMER SERVICE

bsmith@conerymfg.com

Warranty

Conery Mfg Inc warrants to the original consumer that this product shall be free from manufacturing defects for three years after the date of manufacture. During that time period and subject to the conditions set forth below, Conery Mfg Inc will repair or replace, for the original consumer, any component which proves to be defective due to defective materials or workmanship of Conery Mfg Inc.

This warranty does not apply to the misapplication of the products, defects or malfunctions resulting from failure to properly install, operate, or maintain the unit in accordance with the manufacturers instructions, failures resulting from abuse, misuse, accident, or negligence of the product, damage due to lightning or other "Acts of God," or units which are not installed in accordance with applicable local codes, ordinances, or accepted trade practices.

Warranty is void if installation, service, or repair of any component of the product is performed by anyone other than a licensed electrician or other qualified service personnel.

It is the full responsibility of the original consumer to return defective product or component at their own expense. The consumer shall take full responsibility for the removal, shipping, and reinstallation of the product or component. To return a product under warranty, the original consumer should contact Conery Mfg Inc by telephone and request an RG A (Return Goods Authorization) form. It is the responsibility of the consumer to fill out, in completion, the form and return it with the defective products to Conery Mfg Inc. Conery Mfg Inc may also include a 15% restocking fee for non-defective products that were incorrectly ordered by the consumer.

Any implied warranties of merchantability or fitness are limited to the duration of this written warranty. Conery Mfg Inc shall not, in any manner, be liable for any incidental or consequential damages as a result of a breach of this written warranty or any implied warranty.

Conery Mfg Inc reserves the right to change any and all of the information contained in this warranty with no prior notice.

Restocking Fee

Conery Mfg Inc charges a standard 15% restocking fee on returned goods.

Minimum Order Fee

Conery Mfg Inc reserves the right to include up to a \$5.00 minimum order fee for orders that are less than \$30.00 before shipping charges.

Shipping Information

Conery Mfg Inc ships all orders via FedEx Ground unless specified to be expedited or shipped by freight with a carrier of our choice.

CONERY MANUFACTURING | 1380 ENTERPRISE PARKWAY ASHLAND, OHIO 44805 UNITED STATES

WWW.CONERYMFG.COM

419-289-1444

INFO@CONERYMFG.COM

